

800 Series Low-Profile Plug-in Smoke/Heat Detectors



Models Available

882 Photoelectronic Detector
885 Heat Detector



882



885

General Description

System Sensor's 800 series detectors are 2-wire conventional profile plug-in detectors aimed to meet the performance criteria designated by UL. The design for these detectors emphasizes economical and highly reliable. A LED will latch on when the detector is in alarm to provide a local alarm signal. The (-) IN and (-) OUT terminals are short circuited inside the detectors. When the detector is mounted, it will continue the wire to the next device or EOL resistor. When it is removed, the wire will be open for wiring supervision.

The new model 882, a 2-wire conventional photoelectric smoke detector, that uses a state of art optical sensing chamber, has a remote LED connecting feature. This detector is designed to provide an open area protection and to be used with compatible UL listed panels.

The model 885, a 2-wire conventional fixed temperature heat detector, is also designed to provide an open area protection and to be used with compatible UL listed panels.


Specifications

Diameter:	10.2 cm (4")
Height(including base):	4.8 cm (1.8") for Heat 5.0cm(2.0") for Photoelectronic
Operating Temperature Range:	0~38°C (32°F to 100°F) for Heat 0~49°C (32°F to 120°F) for Photoelectronic
Operating Humidity Range:	10% to 93%Relative Humidity, Non-condensing
Max .Air Velocity:	20m/s (heat only)
Latching Alarm:	Reset by momentary power interruption
Sensitivity:	63°C (145.4°F) Fixed (heat only)
Operating Voltage:	8.5~30 VDC for heat 8.5~35 VDC for photoelectronic
Standby Current:	≤50μA for heat ≤90μA for photoelectronic
Alarm Current:	Min. : 2 mA for heat ; 10mA for photoelectronic Max. : 80 mA for heat ; 130mA for photoelectronic


Agency Listings



Mounting Bracket for 800 Series Detector

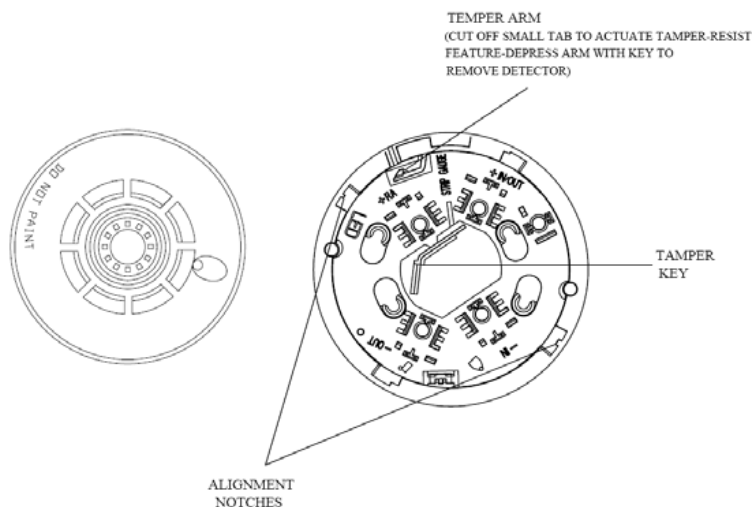

Wiring Diagram For 800 Series Detector

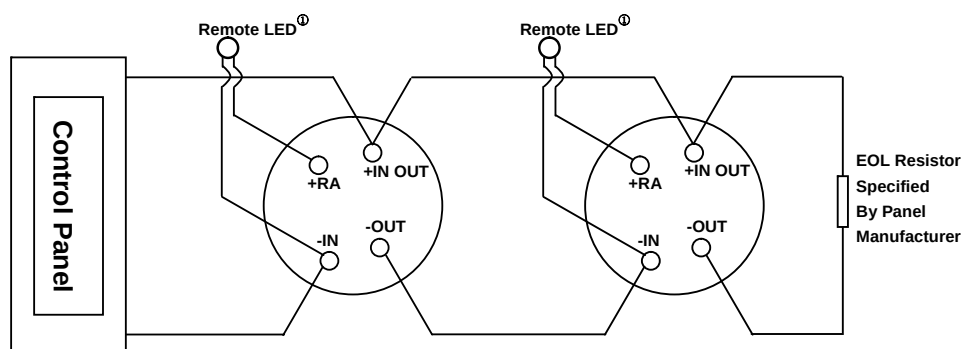

Note:

- ① For 882: If Remote LED is not used, +RA terminal should be free and polarity of these terminals may be reversed.
- For 885: +RA terminal should be free and polarity of these terminals may be reversed.

Ordering information

Detector	Product Description	Photo	Thermal	Wiring	Alarm Current	UL	FM
882	Photoelectronic Detector	Yes	No	2-Wire	10mA~130mA	Yes	No
885	Heat Detector	No	Yes	2-Wire	2mA~80mA	Yes	No
Base							
B801RA	Detector Base	NA	NA	NA	NA	Yes	No



System Sensor Headquarters
3825 Ohio Avenue
St. Charles, IL 60174
Ph: 630-377-6580
Fx: 630-377-6495
Free Phone: 800-736-7672
Web: www.systemsensor.com

System Sensor China
28 Tuan Jie South Road,
Hi-Tech Development Zone
Xi'an, 710075, China
Ph: +86 29 88320119
Fx: +86 29 88325110
Web: www.systemsensor.com.cn

System Sensor Canada
Ph: 905-812-0767
Fx: 905-812-0771

System Sensor Europe
Ph: 44 (0) 1527 406700
Fx: 44 (0) 1527 406699

System Sensor Italy
Ph: 39 040 949 0111
Fx: 39 040 382 137

System Sensor Mexico
Ph: 54 11 4324-1909
Fx: 54 11 4324-5999

System Sensor Far East Ltd
Ph: 852 21919003
Fx: 852 27366580

System Sensor Singapore
Ph: 65 273 2230
Fx: 65 273 2610

System Sensor India
Ph: 91 124 2371770-270
Fx: 91 124 2373118

System Sensor Australia
Ph: 61-3-5428 1142
Fx: 61-3-5428 1172